


# Electric Auto Rice Cooker



Fujimak Electric Auto Rice Cookers have high thermal efficiency and incorporate a sheathed heater for strong resistance to shock and vibration.

## FRC54NC

Cooking Capacity :  
**2.8-5.0kg**  
Rice Pan :  
**1**













## FRC108NC

Cooking Capacity :  
**2.8-10.0kg**  
Rice Pans :  
**2**



## FRC162NC

Cooking Capacity :  
**2.8-15.0kg**  
Rice Pans :  
**3**

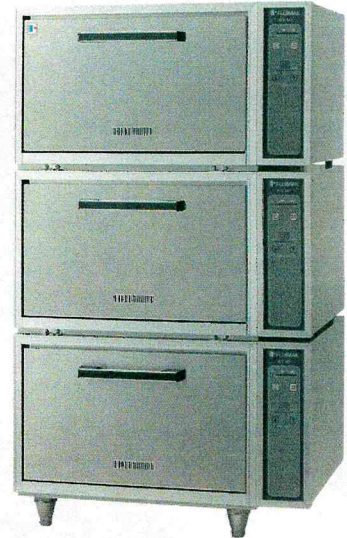

Model	FRC54NC	FRC108NC	FRC162NC
Overall dimensions	750(W)×600(D)×517(H) mm	750(W)×650(D)×964(H) mm	750(W)×650(D)×1381(H) mm
Power supply	3P 200-400V 50/60Hz	3P 200-400V 50/60Hz	3P 200-400V 50/60Hz
Heater element	5.4kW	5.4kW×2	5.4kW×3
Total power consumption	5.4kW	10.8kW	16.2kW
Rice cooking capacity	2.8 ~ 5.0kg	2.8 ~ 10.0kg	2.8 ~ 15.0kg
Electric loading breaker	20A	40A	60A
Adjustable legs	Stainless Steel Plate ±15mm adjustable	Stainless Steel Plate ±15mm adjustable	Stainless Steel Plate ±15mm adjustable
Cooking control	Thermistor	Thermistor	Thermistor
Weight	60kg	120kg	180kg
Attachment (Round rice pan)	Teflon Coated Ø490×190(H) mm×1	Teflon Coated Ø490×190(H) mm×2	Teflon Coated Ø490×190(H)mm ×3

Exterior / Interior / Door : Stainless steel plate Heat insulation : Glass wool

\*The FRC-F series featuring an aluminum interior is also available. Please inquire for details.

\*The two-stack model is also available on a mount in which the lower device is set somewhat higher.